




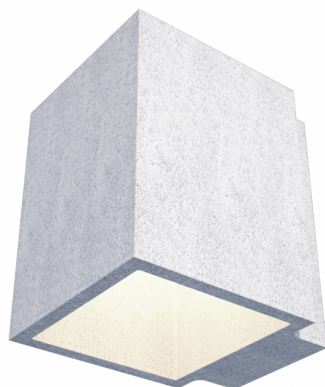
103201.92

Stone applique

Stone applique

Direct emission.

 92 clear concrete



Installations

For installation as applique.

Material

Body in raw concrete of natural colour with high mechanical resistance. Manufactured through craft processes and handmade. Micro porosity, texture, relief, cracks and chromatic variations through time, all enhance the authenticity of material and demonstrate the unique and bespoke feel of each individual piece. LED protected with a diffuser in tempered embossed glass.

Wiring

Integrated electronic driver 220-240V 50/60Hz,
Supplied with 1500mm long cable with water proof protection for electrical connection.
Power factor: 0.9

Photobiological Risk

Certified device in EXEMPT GROUP, in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.

Compliance

In accordance with standard: CEI EN 60598-1:2015 + A11:2009; IEC 60598-2:2015 2-1.

Sources

Type: LED
Color: white
Power: 7W
Color temperature: 3000K
CRI: 80
Nominal flux (Tc=25°C): 522 lm
Lifespan (Ta=25°C): 38000h L70
Lamp included

Photometric data

Luminous flux (Ta=25°C): 360 lm